



The First in Synthetics ®




Marti & Co. AG • Saxweg 5 • CH-9470 Buchs
www.marti-buchs.ch • Tel. 081 750 51 00 • info@marti-buchs.ch

PRODUCT CATALOG 2022 / 1

Alle Preise exkl. Mwst


WHY BUY SIGNATURE SERIES?

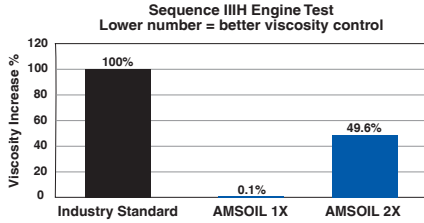

SIGNATURE SERIES RESISTS VISCOSITY INCREASE

AMSOIL is barely challenged by the industry-standard testing, demonstrating only a 0.1% viscosity increase. Even when the test length is doubled, AMSOIL **delivered twice the viscosity control** required by the standard.^{GG}

^{GG}Based on independent testing of AMSOIL Signature Series 5W-30 in the Sequence IIH Engine Test (ASTM D8111), required by the ILSAC GF-6 and API SP specifications.

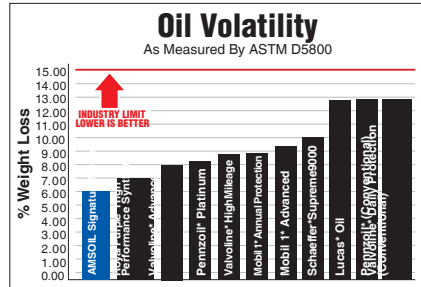

SIGNATURE SERIES HELPS KEEP VALVES CLEAN

AMSOIL fights volatility^U **38% better** than Mobil 1 and **17% better** than Royal Purple, helping reduce oil consumption and keep valves clean.

^UBased on independent testing of AMSOIL Signature Series Synthetic 5W-20, Mobil 1 Advanced Synthetic 5W-20, Royal Purple High Performance Synthetic 5W-20 in ASTM D5800. Oils purchased Oct.-Nov. 2018.

SIGNATURE SERIES HELPS KEEP ENGINES CLEANER

AMSOIL Signature Series is fortified with a heavy treatment of detergent additives, delivering **28 percent more acid-neutralizing power** than Mobil 1⁺ and helping engines stay cleaner, longer.^{LL}

^{LL}Based upon independent testing of Mobil 1 Annual Protection Full Synthetic 5W-30 and AMSOIL Signature Series 5W-30 in ASTM D2896. Oils purchased July 2020.

SIGNATURE SERIES PROTECTS AGAINST LSPI

AMSOIL Synthetic Motor Oils achieved **100% protection** against LSPI.^B

^BBased on zero LSPI events in five consecutive tests of AMSOIL Signature Series, XL and OE 5W-30 Motor Oil in the LSPI engine test required by the GM dexos1 Gen 2 specification.

SIGNATURE SERIES GUARDS TURBOS

Protects turbochargers **72% better** than required^C by the GM dexos1[®] Gen 2 specification.

^CBased on independent testing of AMSOIL Signature Series 5W-30 in the GM turbo coking test.

SIGNATURE SERIES CLEANS

AMSOIL Signature Series Synthetic Motor Oil has **50% more** detergents^D to help keep oil passages clean and promote oil circulation. It provides **90% better protection** against sludge.^{DD}

^{DD}vs. AMSOIL OE Motor Oil^{DD}Based on independent testing of AMSOIL Signature Series 5W-30 in the ASTM D6593 engine test for oil screen plugging as required by the API SN specification.



Signature Series Synthetic Motor Oil

Engineered for enthusiasts seeking maximum protection and performance. Precision-formulated with cutting-edge technology and a longstanding devotion to making the world's best motor oil. The result: engine protection that blows the doors off the highest industry standards. Guaranteed protection for up to 25,000 miles (40,200 km) or 1 year, whichever comes first. Provides 75% more engine protection against horsepower loss and wear.

● **0W-20 (ASM)** CHF 22.28/quart, CHF 83.57/gallon
Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, 5, 4... • GM dexos1[®] Gen 2 (supersedes 6094M) • ACEA A1/B1 • Chrysler MS-6395 • Ford WSS-M2C947-A, WSS-M2C947-B1, WSS-M2C962-A1

MARTI

● **5W-20 (ALM)** CHF 22.28/quart, CHF 83.57/gallon
Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, 5, 4... • GM dexos1[®] Gen 2 (supersedes 6094M) • ACEA A1/B1 • Chrysler MS-6395 • Ford WSS-M2C945-A, WSS-M2C930-A, WSS-M2C945-B1, WSS-M2C960-A1

MARTI

● **0W-30 (AZO)** CHF 22.28/quart, CHF 83.57/gallon
Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, 5, 4... • GM dexos1[®] Gen 2 (supersedes LL-A-025, 6094M, 4718M) • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Ford WSS-M2C963-A1

MARTI

● **5W-30 (ASL)** CHF 22.28/quart, CHF 83.57/gallon
Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, 5, 4... • GM dexos1[®] Gen 2 (supersedes LL-A-025, 6094M, 4718M) • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Honda HTO-06 • Ford WSS-M2C946-A, WSS-M2C929-A, WSS-M2C946-B1, WSS-M2C691-A1

MARTI

● **10W-30 (ATM)** CHF 22.28/quart, CHF 83.57/gallon
Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, 5, 4... • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Ford WSS-M2C205-A • GM LL-A-025, 6094M, 4718M

MARTI

● **0W-40 (AZF)** CHF 22.28/quart
Use in vehicles that require API SP, SN PLUS, SN... • Chrysler MS-12633, MS-10725, MS-10850; Nissan GT-R[®]

MARTI

○ **5W-50 (AMR)** CHF 22.28/quart
Use in vehicles that require API SP, SN PLUS, SN... • Ford WSS-M2C931-C (Mustang)

MARTI

^ABased on independent testing of AMSOIL Signature Series 0W-20, in ASTM D6891 as required by the API SN specification.



XL Synthetic Motor Oil

For enthusiasts who want to do something extra for their vehicle. Engineered for advanced automotive technology, including turbos and direct injection. Boosted formulation delivers more cleaning power and promotes longer engine life. **Provides 64% more protection against oil breakdown^F than required by the GM dexos1[®] Gen 2 specification.** Extra protection that lasts up to 12,000 miles (19,300 km) or 1 year, whichever comes first.

● 0W-20 (XLZ) CHF 18.11/quart

Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, 5, 4... • GM dexos1[®] Gen 2 (supersedes 6094M) • ACEA A1/B1 • Chrysler MS-6395 • Ford WSS-M2C947-A, WSS-M2C947-B1, WSS-M2C962-A1

● 5W-20 (XLM) CHF 18.11/quart

Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, 5, 4... • GM dexos1[®] Gen 2 (supersedes 6094M) • ACEA A1/B1 • Chrysler MS-6395 • Ford WSS-M2C945-A, WSS-M2C930-A, WSS-M2C945-B1, WSS-M2C960-A1

● 5W-30 (XLF) CHF 18.11/quart

Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, 5, 4... • GM dexos1[®] Gen 2 (supersedes LL-A-025, 6094M, 4718M) • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Honda HTO-06 • Ford WSS-M2C946-A, WSS-M2C929-A, WSS-M2C946-B1, WSS-M2C691-A1

● 10W-30 (XLT) CHF 18.11/quart

Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, 5, 4... • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Ford WSS-M2C205-A • GM 6094M, 4718M

○ 10W-40 (XLO) CHF 18.11/quart

Use in vehicles that require API SP, SN PLUS, SN... • ACEA A3/B3, A3/B4*



OE Synthetic Motor Oil

Delivers 100% synthetic engine protection for advanced automotive technology, including turbos and direct injection. **Provides 47% more wear protection.^G** Specifically formulated for the longer drain intervals recommended by original equipment (OE) manufacturers.

● 0W-16 (OES) CHF 15.32/quart

Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6B

● 0W-20 (OEZ) CHF 15.32/quart

Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, 5, 4... • GM dexos1[®] Gen 2 (supersedes 6094M) • ACEA A1/B1 • Chrysler MS-6395 • Ford WSS-M2C947-A, WSS-M2C947-B1, WSS-M2C962-A1

● 5W-20 (OEM) CHF 15.32/quart

Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, 5, 4... • GM dexos1[®] Gen 2 (supersedes 6094M) • ACEA A1/B1 • Chrysler MS-6395 • Ford WSS-M2C945-A, WSS-M2C930-A, WSS-M2C945-B1, WSS-M2C960-A1

● 5W-30 (OEF) CHF 15.32/quart

Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, 5, 4... • GM dexos1[®] Gen 2 (supersedes LL-A-025, 6094M, 4718M) • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Honda HTO-06 • Ford WSS-M2C946-A, WSS-M2C929-A, WSS-M2C946-B1, WSS-M2C691-A1

● 10W-30 (OET) CHF 15.32/quart

Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, 5, 4... • ACEA A5/B5, A1/B1 • Chrysler MS-6395 • Ford WSS-M2C205-A • GM 6094M, 4718M

Tough-to-reach fill hole?

Order a flexible pour spout with your oil to make the job easier. Fits quarts and gallons.



^FBased on independent testing of AMSOIL XL 5W-30 motor oil in the GMOD engine test required for the GM dexos1 Gen2 specification. ^GBased on independent testing of OE 0W-20 in the Peugeot TU3M Wear Test as required by the dexos1 Gen 2 specification.

BUILD IT.



● Assembly Lube (EAL) CHF 11.61 /tube 118ml **MARTI**

Formulated to cling to engine parts and provide exceptional wear protection in newly built or rebuilt high-performance, racing and other four-stroke engines.

● Break-In Oil (BRK) CHF 17.18 /quart **MARTI**

Allows for quick and efficient piston ring seating in new and rebuilt high-performance and racing engines.

CRUISE IT.



Z-ROD® Synthetic Motor Oil

High-zinc, high-phosphorus formulation engineered specifically for classic cars and performance vehicles.

● 10W-30 (ZRT) **MARTI**

Use in vehicles that require API SL, SJ...

CHF 21.36 /quart

○ 10W-40 (ZRD)

Use in vehicles that require API SL, SJ...

CHF 21.36 /quart

● 20W-50 (ZRF) **MARTI**

Use in vehicles that require API SL, SJ...

CHF 21.36 /quart

AMSOIL DELIVERS SUPERIOR RUST PROTECTION

In industry-standard testing, AMSOIL Z-ROD® completely prevented rust formation while a leading competitor did not.^{JJ}

Competing Brand



AMSOIL



^{JJ}Based upon in-house testing of AMSOIL Z-ROD 10W-40 and a leading competitor obtained on 7/25/2019 in ASTM D1748-10.

RACE IT.



CHF 25.53 /quart

CHF 25.53 /quart

CHF 25.53 /quart,
CHF 99.81 /gallon

CHF 25.53 /quart

DOMINATOR® Synthetic Racing Oil

Superior performance and maximum protection in high-performance and racing applications.

● 5W-20 (RD20)

● 15W-50 (RD50) **MARTI**

● 10W-30 (RD30) **MARTI**

○ SAE 60 (RD60) **MARTI**


● 20W-50 Synthetic Competition Diesel Oil (DCO)

Delivers 50% more film thickness^Q to withstand high cylinder pressures and protect against wear.

^QCompared to the 3.5 cP HTHS limit for SAE 15W-40.



CHF 25.07 /quart



"AMSOIL products are the best on the market and definitely give us an added performance factor."

BRYCE MENZIES
Professional Off-Road Driver

Premium Protection Synthetic Motor Oil

Ideal for gasoline engines and pre-2007 diesel applications not equipped with diesel particulate filters (DPFs), where the extra protection of a high-zinc formula is desired.

- **10W-40 (AMO)** CHF 18.57 /quart
Use in vehicles that require API CI-4+/SL... • ISO-L-EMA • Caterpillar ECF-1 • JASO MA (Motorcycle) • MAN 271/3275 • MTU Type 2 • Cummins 20071/20072/20076/20077 • Volvo VDS-2, VDS • Mack EO-M+ • ACEA A3/B3/ E3/ E5 • MB 228.1, 228.3, 229.1 • Detroit Diesel 93K214

MARTI

- **20W-50 (ARO)** CHF 18.57 /quart
Use in vehicles that require API CI-4+/SL... • ISO-L-EMA • Caterpillar ECF-1 • JASO MA (Motorcycle) • MAN 271/3275 • MTU Type 2 • Cummins 20071/20072/20076/20077 • Volvo VDS-2, VDS • Mack EO-M+ • ACEA A3/B3/ E3/ E5 • MB 228.1, 228.3, 229.1 • Detroit Diesel 93K214



PREMIUM PROTECTION FOR EUROPEAN VEHICLES

Emissions System Protection

AMSOIL Synthetic European Motor Oil features precisely balanced formulations that consider the needs of modern exhaust treatment devices. It is important to use an oil that meets the proper specification to ensure optimum engine protection and performance.

Synthetic European Motor Oil

Specially formulated for the lubrication needs of European gasoline and diesel cars and light trucks.

- **Outstanding** All-Season Performance
- **Engineered** for Maximum Fuel Economy
- **Enhanced** Turbocharger Protection

EUROPEAN MOTOR OIL

- **0W-20 LS-VW Synthetic European Motor Oil (EZT)** CHF 25.07 /quart

Use in vehicles that require API SN-PLUS, SN... • ACEA C5 • VW 508.00/509.00

- **0W-20 LS Synthetic European Motor Oil (AFE)** CHF 20.89 /quart

Use in vehicles that require API SN-PLUS (Resource Conserving), SN, SM... • ILSAC GF-5 • ACEA C5 • A1/B1 • BMW LL-17FE+ • MB 229.71 • Ford WSS-M2C947-B1 • Opel/Vauxhall OV0401547 • Fiat 9.55535-GSX • Chrysler MS-12145 • Volvo VCC RBS0-2AE

- **5W-30 LS Synthetic European Motor Oil (AEL)** CHF 24.14 /quart CHF 91.46 /gallon

Manufacturer Approvals: VW 504.00/507.00

Use in vehicles that require API SN • ACEA C3 • GM dexos2™ • Chrysler MS-11106 • MB 229.51 • BMW LL-04 • Porsche C30

- **5W-40 MS Synthetic European Motor Oil (AFL)** CHF 21.82 /quart CHF 81.24 /gallon

Manufacturer Approvals: MB-Approval 229.51 • Porsche A40

Use in vehicles that require ACEA C3 • API SN/SM/CF... • BMW Longlife-04 • Chrysler MS-10850 (supersedes MS-10896) • Ford WSS-M2C917-A • GM dexos2™ (supersedes LL-A-025 and LL-B-025) • Renault RN0700/RN0710 • Audi/Volkswagen 502.00/505.01

- **0W-40 FS Synthetic European Motor Oil (EFO)** CHF 21.36 /quart

Use in vehicles that require ACEA A3/B3, A3/B4 • API SN/SM... • BMW LL-01 • MB 229.1, 229.3, 229.5 • Porsche A40 • Renault 0710, 0700 • Audi/Volkswagen 502.00/505.00

- **5W-40 FS Synthetic European Motor Oil (EFM)** CHF 19.03 /quart

Manufacturer Approvals: MB-Approval 229.5 • Porsche A40 • VW/Audi 502.00/505.00

Use in vehicles that require ACEA A3/B3, A3/B4 • API SN/SM... • BMW LL-01 • Renault 0710, 0700



WHY BUY AMSOIL SYNTHETIC DIESEL OIL?

Competing Brand



Severely Scuffed Liner




Non-Scuffed Liner

AMSOIL FIGHTS WEAR

AMSOIL delivers **powerful engine protection**. How good is it? In independent testing compared to a leading brand, AMSOIL provided long-lasting wear protection, **keeping cylinder liners looking like new**.^{DD}

^{DD}Based on third-party testing of AMSOIL 5W-30 Signature Series Max-Duty Synthetic Diesel Oil and a leading conventional 15W-40 diesel oil using the Detroit Diesel® DD13 Scuffing test for specification DFS 93K222. *All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.



DHD



DTT



DZF



DEO



DME

SIGNATURE SERIES MAX-DUTY SYNTHETIC DIESEL OIL

The top tier of AMSOIL protection and performance for diesel engines. Provides 6X more engine protection.¹ Delivers up to 60% better turbo cleanliness¹ and withstands the extra demands you place on the turbo when pulling heavy loads or updating the tune for maximum horsepower. Provides up to 76% less oil consumption than required by the API CK-4 standard in the Caterpillar-1N oil consumption test. Provides up to 2X better rust protection.^K

● 5W-30 (DHD) **MARTI** CHF 77.99 /gallon

Use in vehicles that require API CK-4/SN+, CJ-4... • ACEA E9, E7, E6 • Mack EOS-4.5, EO-O • Detroit Diesel DFS 93K222, DDC 93K218, 93K215, 93K214 • Caterpillar ECF-3, ECF-2, ECF-1-a • Cummins CES20086, CES20081 • Volvo VDS-4.5, VDS-4, VDS-3 • MB 228.51, 228.31 • MTU Type 3.1, 2.1, II, I • MAN 3677, 3575 • JASO DH-2 • Renault RLD-4, RLD-3 • Deutz DQC IV-10 LA, DQC III-10 LA • Scania LA-2 • Chrysler MS 10902 • Ford WSS-M2C214-B1

● 10W-30 (DTT) **MARTI** CHF 73.35 /gallon

Use in vehicles that require API CK-4/SN, CJ-4, CI-4+, CF • Volvo VDS4.5, VDS4, VDS3 • Mack EOS-4.5, EO-O • Renault RLD-4, RLD-3 • Cummins CES20086, CES20081 • Caterpillar ECF-2, ECF-3, ECF-1-a • DDC 93K218, 93K215, 93K214 • DFS 93K222 • ACEA E9, E7 • MB 228.31 • MAN 3575 • MTU Type 2.1, II, I • JASO DH-2 • Deutz DQC III-10 LA • Ford WSS-M2C171-F1 • Chrysler MS 10902

● 0W-40 (DZF) CHF 24.61 /quart

Delivers 4X better cold-temperature performance^{EE}

Use in vehicles that require API CK-4/SN, CJ-4... • ACEA E9, E7 • Mack EOS-4.5, EO-O • Detroit Diesel DDC 93K218, 93K215, 93K214 • Caterpillar ECF-3, ECF-2, ECF-1-a • Cummins CES20086, CES20081 • Volvo VDS-4.5, VDS-4, VDS-3 • MTU Type 2.1, II, I • MAN 3575 • JASO DH-2 • Renault RLD-4, RLD-3 • Deutz DQC III-10 LA • Chrysler MS 10902 • Ford WSS-M2C171-F1

● 5W-40 (DEO) CHF 22.28 /quart

Use in vehicles that require API CK-4/SN, CJ-4... • ACEA E9, E7 • Mack EOS-4.5, EO-O • Detroit Diesel DFS 93K222, DDC 93K218, 93K215, 93K214 • Caterpillar ECF-3, ECF-2, ECF-1-a • Cummins CES20086, CES20081 • Volvo VDS-4.5, VDS-4, VDS-3 • MB 228.31 • MTU Type 2.1, II, I • MAN 3575 • JASO DH-2 • Renault RLD-4, RLD-3 • Deutz DQC III-10 LA • Allison TES-439 • Scania LA-2 • Chrysler MS 10902 • Ford WSS-M2C171-F1

● 15W-40 (DME) **MARTI** CHF 82.17 /gallon

Use in vehicles that require API CK-4/SN, CJ-4... • ACEA E9, E7 • Mack EOS-4.5, EO-O • Detroit Diesel DFS 93K222, DDC 93K218, 93K215, 93K214 • Caterpillar ECF-3, ECF-2, ECF-1-a • Cummins CES20086, CES20081 • Volvo VDS-4.5, VDS-4, VDS-3 • MB 228.31 • MTU Type 2.1, II, I • MAN 3575 • JASO DH-2 • Renault RLD-4, RLD-3 • Deutz DQC III-10 LA • Allison TES-439 • Scania LA-2 • Chrysler MS 10902 • Ford WSS-M2C171-F1

¹than required by the Detroit Diesel DD13 Scuffing Test for Specification DFS 93K222 using 5W-30 as worst-case representation. ^{EE}Based on specification standards of CAT C13 2nd Ring Top Land Carbon testing. ^KBased on industry standard testing using the NMMA FC-W Rust Test. ^{DD}When compared to SAE 15W-40 in ASTM D5293 Cold Cranking Viscosity Test.



Heavy-Duty Synthetic Diesel Oil

Outstanding protection and performance for customers seeking an upgrade over conventional, synthetic-blend and other synthetic diesel oils. Provides 4X more wear protection.¹

● 10W-30 (ADN) CHF 15.78 /quart

Use in vehicles that require API CK-4, CJ-4... • ACEA E9, E7 • Mack EOS-4.5, EO-O • Detroit Diesel DFS 93K222, DDC 93K218, 93K215, 93K214 • Caterpillar ECF-3, ECF-2, ECF-1-a • Cummins CES20086, CES20081 • Volvo VDS-4.5, VDS-4, VDS-3 • MB 228.31 • MTU Type 2.1, II, I • MAN 3575 • JASO DH-2 • Renault RLD-4, RLD-3 • Deutz DQC III-10 LA • Ford WSS-M2C171-F1 • Chrysler MS 10902

● 5W-40 (ADO) CHF 59.42 /gallon

MARTI

Use in vehicles that require API CK-4, CJ-4... • ACEA E9, E7 • Mack EOS-4.5, EO-O • Detroit Diesel DFS 93K222, DDC 93K218, 93K215, 93K214 • Caterpillar ECF-3, ECF-2, ECF-1-a • Cummins CES20086, CES20081 • Volvo VDS-4.5, VDS-4, VDS-3 • MB 228.31 • MTU Type 2.1, II, I • MAN 3575 • JASO DH-2 • Renault RLD-4, RLD-3 • Deutz DQC III-10 LA • Allison TES-439 • Chrysler MS 10902 • Ford WSS-M2C171-F1

● 15W-40 (ADP) CHF 18.11 /quart

Use in vehicles that require API CK-4, CJ-4... • ACEA E9, E7 • Mack EOS-4.5, EO-O • Detroit Diesel DFS 93K222, DDC 93K218, 93K215, 93K214 • Caterpillar ECF-3, ECF-2, ECF-1-a • Cummins CES20086, CES20081 • Volvo VDS-4.5, VDS-4, VDS-3 • MB 228.31 • MTU Type 2.1, II, I • MAN 3575 • JASO DH-2 • Renault RLD-4, RLD-3 • Deutz DQC III-10 LA • Allison TES-439 • Chrysler MS 10902 • Ford WSS-M2C171-F1

¹than required by the Detroit Diesel DD13 Scuffing Test for Specification DFS 93K222 using 10W-30 as worst-case representation.



100% Synthetic Diesel Oil

Provides outstanding protection, performance and fuel economy for smaller American diesel pickups, vans, cars and SUVs. Delivers up to 6X better wear protection than required by a leading industry standard.¹

● 0W-20 CHF 15.78 /quart

Use in vehicles that require GM dexosD

● 5W-30 CHF 15.78 /quart

MARTI

Use in vehicles that require GM dexosD, dexos2 • Chrysler MS-11106 • Ford WSSM2C214-B1 • ACEA C3

¹Based on third-party testing in the OM646LA cam wear test using 0W-20 as worst-case representation.



CI-4+ Synthetic Diesel Oils

Provide outstanding protection for pre-2007 on- and off-road diesel applications not equipped with diesel particulate filters (DPFs).

● Series 3000 5W-30 Synthetic Heavy Duty Diesel Oil (HDD)

Use in vehicles that require API CI-4+/SL... • Global DHD-1 • ACEA A3/B3, E2, E3, E5, E7 • JASO DH-1 • Mack EO-M, EO-N • DDC 93K214 • MAN 271/3275 • MTU Type II • Caterpillar ECF-1-a, ECF-2 • Cummins CES 20076, 20077, 20078 • Volvo VDS-3, VDS-2 • MB 228.1, 228.3, 229.1 CHF 18.57 /quart

● 15W-40 Synthetic Heavy Duty Diesel and Marine Oil (AME)

Use in vehicles that require API CI-4+/SL... • Global DHD-1 • ACEA A3/B3, E2, E3, E5, E7 • JASO DH-1 • Mack EO-M, EO-N • DDC 93K214 • Caterpillar ECF-1-a, ECF-2 • Cummins CES 20076, 20077, 20078 • Volvo VDS-3, VDS-2 • MB 228.1, 228.3, 229.1 • MAN 271, 3275 • MTU Type II CHF 18.57 /quart



Like Series 3000?

Try Signature Series Max-Duty 5W-30 for a serious upgrade. See page 6.

Oil Analysis

AMSOIL offers oil analysis service options from Oil Analyzers Inc. By analyzing used engine oil, a qualified lab can detect mechanical problems your equipment may have developed. For more information, visit www.oiltesting.com.

Oil Analyzers

INC.




Oil Suction Pump (G1206)

AMSOIL Resists Viscosity Breakdown

AMSOIL resists viscosity breakdown **6X** better than Harley-Davidson* SYN3* for improved protection against compensator and transmission gear wear.^{BB}

Viscosity Breakdown

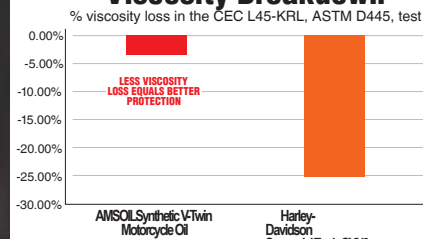

^{BB}Based on testing of AMSOIL 20W-50 Synthetic V-Twin Motorcycle Oil purchased on 3/19/19 and Harley-Davidson Screamin' Eagle SYN3 purchased on 3/19/19 in the CEC L45-KRL, ASTM D445 test. *All trademarks and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.

RIDE HARD. RUN COOL.®



Synthetic V-Twin Motorcycle Oil



- **20W-50 (mcv)** CHF 26.00 /quart, CHF 97.96 /gallon **MARTI**
Use in bikes that require API SG, SL/CF, CG-4 • JASO MA/MA2 • ISO-L-EMA2

Superior synthetic formulation provides long service life and maximum protection against engine wear in Harley-Davidson*, Buell*, Ducati*, Aprilia*, BMW* and other motorcycle engines, primaries and transmissions.

V-Twin Oil Change Kits (HDCK, HDBK, HDMB, HDMC)

Includes everything needed to perform an oil change on most Harley-Davidson motorcycles, including 20W-50 Synthetic V-Twin Motorcycle Oil, AMSOIL Motorcycle Oil Filter and O-ring.

HDBK: CHF 97.96 /kit HDCK: CHF 115.60 /kit

- **SAE 60 (mcs)** CHF 26.00 /quart **MARTI**
Use in bikes that require API SG, SL/CF, GL-1 • JASO MA/MA2 • ISO-L-EMA2

Superior synthetic formulation provides long service life and maximum protection against engine wear in big-bore, air-cooled motorcycle engines, including Harley-Davidson Panhead, Shovelhead and Knucklehead.

- **20W-40 (mvi)** CHF 24.14 /quart **MARTI**
Use in bikes that require API SM • JASO MA • ILSAC GF-4

Superior synthetic formulation provides long service life and maximum protection against engine wear in Indian* and Victory* motorcycles.

- **15W-60 (msv)** CHF 24.14 /quart **MARTI**
Use in bikes that require API SM • JASO MA • ILSAC GF-4

Superior synthetic formulation provides long service life and maximum protection against engine wear in Indian and Victory motorcycles.

- **Synthetic V-Twin Transmission Fluid (mvt)**
Helps quiet V-twin transmission noise and enable smooth shifts. **MARTI** CHF 24.14 /quart

- **Synthetic V-Twin Primary Fluid (mvp)**
Delivers consistent clutch feel and helps riders easily find neutral. **MARTI** CHF 24.14 /quart



Synthetic Metric Motorcycle Oil



● 10W-40 (MCF)

MARTI

Use in bikes that require API SM, SG, SL, CF • JASO MA/MA2 • ISO-L-EMA2

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Can-Am*, Honda*, Yamaha*, Kawasaki*, Triumph*, Suzuki*, BMW* and other motorcycle engines.

CHF 24.14 /quart



● 10W-30 (MCT)

Use in bikes that require API SH, SG, CF • JASO MA/MA2 • ISO-L-EMA2

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Honda, Yamaha, Suzuki and Kawasaki motorcycles.

CHF 24.14 /quart



● 15W-50 (MFF)

MARTI

Use in bikes that require API SM • JASO MA/MA2

Superior synthetic formulation provides long service life, smooth shifts and maximum protection against engine wear in Ducati*, BMW, KTM*, Yamaha, Triumph and Royal Enfield* motorcycles.

CHF 24.14 /quart



SWAP
MOTO
RACE SERIES



Synthetic Dirt Bike Oil

Delivers confidence in clutch feel, maximum horsepower and superior wear protection in all types of four-stroke dirt bikes.

● 10W-40 (DB40)

Use in bikes that require JASO MA • API SG, SJ, SH, SL

MARTI CHF 19.96 /quart

● 10W-50 (DB50)

Use in bikes that require JASO MA • API SG, SJ, SH, SL

MARTI CHF 19.96 /quart

● 10W-60 (DB60)

Use in bikes that require JASO MA • API SG, SJ, SH, SL

MARTI CHF 19.96 /quart


○ Synthetic Dirt Bike Transmission Fluid (DBTF)

Use in two-stroke dirt bike transmissions and the Honda CRF.

MARTI CHF 16.71 /quart

AMSOIL delivers confident clutch feel.

AMSOIL provides excellent clutch protection[†]. How good is it? In extreme simulated-start testing, AMSOIL provided superior wear protection and kept clutch plates looking new.

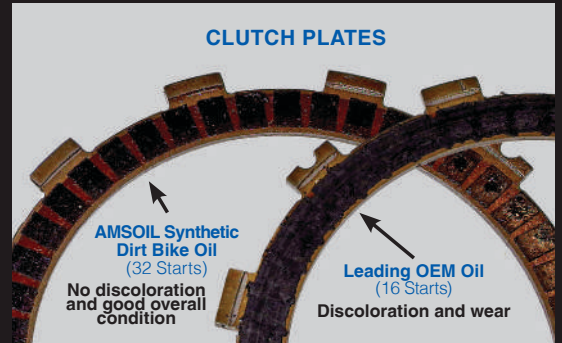

[†]Based on dyno testing of a Honda CRF450 dirt bike using AMSOIL 10W-40 Synthetic Dirt Bike Oil and a leading original equipment manufacturer 10W-40 conventional dirt bike oil.



Synthetic ATV/UTV Motor Oil

Formulated to provide upgraded performance and protection for hard-working and performance ATVs and UTVs.

● **10W-40 (AUV40)** CHF 22.28 /quart **MARTI**

● **5W-50 (AUV50)** CHF 22.28 /quart **MARTI**

ATV/UTV Oil Change Kits

(PK1, PK2, PK3, CK1, CK2, CK3)

Contains everything needed to perform an oil change on most Polaris* (PK) and Can-Am* (CK) UTVs and ATVs. Call (715) 399-8324 (TECH) (Monday-Friday, 8 a.m. - 5 p.m. Central Time) or contact the AMSOIL Dealer listed on the back of your catalog (if one is listed) to determine the appropriate kit for your application.

PK1: CHF 70.57 /Kit **MARTI**
 PK2: CHF 65.46 /Kit **MARTI**
 PK3: CHF 62.67 /Kit
 CK2: CHF 92.85 /Kit

● **Synthetic ATV/UTV Transmission & Differential Fluid (AUDT)** CHF 22.75 /quart **MARTI**

Protects heavily loaded, high-torque ATV and UTV gears and bearings against wear in the most severe operating conditions. Convenient easy-pack helps access tough-to-reach fill holes, making the job faster and cleaner.

● **Synthetic ATV/UTV Powertrain Fluid (AUPF)**

Purpose-built for transmissions/differentials and front drives in Polaris* ATVs and UTVs, offering the perfect combination of protection and convenience.

CHF 24.14 /easy pack **MARTI**



Synthetic Marine Engine Oil

Formulated specifically for use in four-stroke gasoline-fueled engines used in marine applications. Certified to meet NMMA FC-W Catalyst Compatible performance specifications.

- **10W-30 (WCT)** CHF 19.96 /quart
Use in boat motors that require API SM • NMMA FC-W Catalyst Compatible (Registration #FC-00833T) • JASO MA
- **10W-40 (WCF)** CHF 19.96 /quart
Use in boat motors that require API SM • NMMA FC-W Catalyst Compatible (Registration #FC-00850T) • JASO MA
 - Outboard • Inboard • Inboard/Outboard (I/O)
 - Personal Watercraft
- **25W-40 (Synthetic Blend) (WCM)**
Use in boat motors that require API SM • NMMA FC-W Catalyst Compatible (Registration #FC-11825T) • JASO MA
CHF 19.96 /quart



● HP Marine™ Synthetic 2-Stroke Oil (HPM)

CHF 22.28 /quart

Prevents piston skirt scuffing, cylinder bore scuffing and ring sticking in all two-stroke outboard motors, personal watercraft and anywhere NMMA TC-W3 and API-TC oils are specified.

Use in boat motors that require NMMA TC-W3 or API TC.



Pete Maina
Pro Fisherman



● **Outboard 100:1 Pre-Mix Synthetic 2-Stroke Oil (ATO)** CHF 28.32 /quart

Contains a heavy dose of low-temperature dispersant additives that excel at reducing varnish and carbon deposit formation in water-cooled outboard motors.

Use in boat motors that require TC-W3

● **Universal Synthetic Marine Gear Lube (AGM)** CHF 19.96 /quart

Resists foam and retains extreme-pressure qualities in outboard lower units, stern drives, V-drives, bow and tunnel thrusters and marine transmissions. Delivers advanced outboard protection against power loss and gear wear, even with up to 15 percent water contamination.¹ Choose the easy-pack for fast, easy installation.

Use in applications that require GL-5, GL-4



OUTSTANDING PROTECTION FOR LOWER UNITS



Marine Gear Lube Pump (G3456)

Specifically designed to ease installation and reduce mess when servicing lower units.



Midwest Fishing Report



www.amsoil.com/mfr

¹Based upon AMSOIL testing of AMSOIL Synthetic Marine Gear Lube 75W-90 in ASTM 3233 and ASTM D892.



Runs On Freedom®

Limited Snowmobile Warranty

Use AMSOIL INTERCEPTOR® Synthetic 2-Stroke Oil exclusively in your current-model-year or newer sled and we'll cover engine repairs in the unlikely event of any engine breakdown for up to two years/5,000 miles.*

*To get details and register, visit AMSOIL.com/rof/warranty.



MAXIMUM
PERFORMANCE



● DOMINATOR® Synthetic 2-Stroke Racing Oil (TDR) **MARTI** CHF 24.14 /quart

Delivers outstanding wear protection in high-horsepower and modified racing or trail motors, including snowmobiles, motorcycles, ATVs, personal watercraft, go-carts and outboard motors.

Use in snowmobiles that require API TC

● INTERCEPTOR® Synthetic 2-Stroke Oil (AIT) **MARTI** CHF 24.14 /quart

Prevents piston skirt scuffing, ring sticking and exhaust power valve sticking in two-stroke snowmobiles.

Use in snowmobiles that require API TC

● Synthetic 2-Stroke Injector Oil (AIO) CHF 19.50 /quart

High-quality, cost-effective oil for the severe operating conditions of two-stroke snowmobiles and outboard motors.

Use in snowmobiles and boat motors that require TC-W3 • API TC

● SABER® Professional Synthetic 2-Stroke Oil (ATP) CHF 26.00 /quart

Provides superior protection for handheld two-stroke equipment at any mix ratio up to 100:1, offering the ultimate in convenience.

Use in power equipment that requires ISO-L-EGD • API TC • JASO FD

○ Synthetic Chaincase & Gear Oil (TCC) CHF 16.71 /473ml

Superior protection for enclosed chains and gears found in snowmobiles, ATVs, UTVs and general equipment.

AIO



MAXIMUM
RELIABILITY



Meets the performance requirements of Polaris®, Arctic Cat® and Ski-Doo® two-stroke snowmobiles.

ATP



TCC



SABER Professional Fights Carbon

Equipment using SABER Professional was **96% carbon-free^N**.



AMSOIL SABER Professional
300 Hours
3.8% Screen Blockage

VS.



Leading Oil Brand
45 Hours
98% Screen Blockage

^NBased on spark-arrestor testing.

AMSOIL Fights Wear

AMSOIL INTERCEPTOR® Synthetic 2-Stroke Oil delivered **outstanding wear protection and cleanliness** in a rental sled throughout 1,617 miles of abuse.^{CC}

AMSOIL kept pistons virtually free of carbon with nearly all coating intact.



AMSOIL fought the formation of carbon deposits, allowing power valves to move freely.



^{CC}Based upon used and new 2019 Polaris® RMK® 850 as a rental sled at Grizzly Lodge, December 2018 - February 2019. *All trademarks, names and images are the property of their respective owners and may be registered trademarks in some countries. No affiliation or endorsement is claimed, expressed or implied, made by their use.

GBS2960



● Briggs & Stratton Synthetic 4T Racing Oil (GBS2960)

CHF 27.39 /quart

Formulated by AMSOIL specifically for stock and modified small-displacement air-cooled racing engines and recommended for any four-stroke air-cooled competition engine.



Synthetic Small-Engine Oil

Helps preserve engine power, reduce oil consumption and reduce maintenance in small engines used in severe service.

Riding and Push Lawnmowers • Snowblowers • Generators • Pumps • Welders • Skid-Steers • Compressors • and more

○ **5W-30 (AES)** CHF 17.18 /quart
Use in equipment that requires API SL, SJ, SH, SG • API CF, CD • JASO MA/MA2

● **10W-30 (ASE)** CHF 15.32 /quart
Use in equipment that requires API SL, SJ, SH, SG • API CF, CD • JASO MA/MA2

● **10W-40 (ASF)** CHF 15.32 /quart
Use in equipment that requires API SL, SJ, SH, SG • API CF, CD • JASO MA/MA2

● **15W-50 (SEF)** CHF 16.25 /quart
Use in equipment that requires API SL, SJ, SH, SG • API CF, CD • JASO MA/MA2

● **20W-50 Zero-Turn Synthetic Hydrostatic Transmission Fluid (AHF)** CHF 19.50 /quart

Fights wear to deliver smooth control and responsive power in zero-turn hydrostatic mowers.

Use in hydrostatic transmissions that require 15W-50 or 20W-50 oil recommended for API SM, SL, SJ, SH or SG.

● Formula 4-Stroke® Powersports Synthetic Motor Oil (AFF)

CHF 22.28 /quart

Specially formulated for four-stroke recreational motors, including ATVs and snowmobiles.

Use in ATVs/UTVs and snowmobiles that require API SG, SJ, SL/CF • JASO MA/MA2 • ISO-L-EMA2

○ Formula 4-Stroke® Synthetic Scooter Oil (ASO)

Formulated specifically to meet the special needs of today's high-tech air- and water-cooled four-stroke motorized scooters. CHF 15.32 /quart

Use in scooters that require API SG, SL/CF • JASO MA/MA2 • ISO-L-EMA2

Shock Therapy® Suspension Fluid

Controls friction, heat, wear, foaming and scuffing in suspension components.

● **Lightweight #5 (STL)** CHF 26.93 /quart **MARTI**
Use in applications that demand quick rebounds under extreme temperatures.

● **Medium #10 (STM)** CHF 26.93 /quart **MARTI**
Use in applications that require more dampening and slower rebounds.





Signature Series Synthetic Automatic Transmission Fluid

Provides reserve protection in fleet vehicles, work trucks and other severe-service applications that quickly break down other lubricants.

- **Multi-Vehicle (ATF)** CHF 26.93 /Beutel, CHF 101.21 /gallon **MARTI**
 Use in applications that require Allison C-4, TES-389 · BMW 7045E, 8072B, LA 2634, LT 71141 · Chrysler ATF+4, Mopar ASRC, 68089195AA, 68049954AA · Ford MERCON, MERCON V, ESP-M2C166-H, FNR5, M2C924-A, XL-12 · GM DEXRON II, DEXRON III, AutoTrak II · Honda/Acura ATF-Z1 · Hyundai/Kia SP-II, SP-III, Red-1 · IDEMITSU K17 · JASO 1A · JWS 3309, 3314, 3317 · MAN 339 Type V-1, 339 Type V-2, 339 Type Z-1, 339 Type Z-2, 339 Type Z-3, 339F · Mazda ATF-M III, ATF-MV, F-1 · Mercedes Benz 236.1, 236.2, 236.3, 236.5, 236.6, 236.7, 236.9, 236.10, 236.11, 236.81, 236.91 · Mitsubishi SP-II, SP-III, ATF-J2 · Nissan Matic-D, Matic-J, Matic-K, 402 · Saab 3309 · Shell 3403, LA 2634 · Subaru ATF, ATF-HP · Suzuki 3314, 3317 · Texaco ETL-7045E, ETL-8072B, N402 · Toyota Type T, T-II, T-III, T-IV · Voith 55.6335, 55.6336 · Volvo 97340, 97341 · VW/Audi G 052 162, G 052 990, G 055 025 · ZF TE-ML 03D, 04D, 05L, 09, 11A, 11B, 14A, 14B, 14C, 16L, 16M, 17C, 20B, 20C, 21L

- **Fuel-Efficient (ATL)** CHF 26.93 /quart, CHF 101.21 /gallon **MARTI**
 Engineered to exceed the requirements of original equipment manufacturers (OEMs) specifying low-viscosity oil.

Use in applications that require Aisin-Warner AW-1 · BMW 83 22 0 142 516, 83 22 2 152 426 · Chrysler Mopar 68157995A, 68218925AB, SP-IV · DSIH 6p805 · Ford MERCON LV, SP, ULV · GM DEXRON HP, VI, ULV · Honda/Acura DW-1, Type 3.0 · Hyundai/Kia SP-IV, SPH-IV, SP-IV-RR, NWS-9638, SP4-M · JASO 1A-LV · JWS 3324 · Mercedes Benz 236.12, 236.14, 236.15, 236.41 · Mitsubishi SP-IV, ATF J3, ATF-PA · Nissan Matic-S, Matic-W · Saab 93 165 147 · Shell M-1375.4, M-1375.5, M-1375.6, M-L 12108 · Toyota WS · Volvo 31256774 · VW/Audi G 055 005, G 055 162, G 060 162 · ZF S671 090 255

OE Synthetic Automatic Transmission Fluid

Resists wear and provides smooth shifts in passenger-car/light-truck transmissions.

- **Multi-Vehicle (OTF)** CHF 21.82 /quart
 Use in applications that require Allison C-4, TES-389 · BMW 7045E, 8072B, LA 2634, LT 71141 · Chrysler ATF+4, Mopar ASRC, 68089195AA, 68049954AA · Ford MERCON, MERCON V, ESP-M2C166-H, FNR5, M2C924-A, XL-12 · GM DEXRON II, DEXRON III, AutoTrak II · Honda/Acura ATF-Z1 · Hyundai/Kia SP-II, SP-III, Red-1 · IDEMITSU K17 · JASO 1A · JWS 3309, 3314, 3317 · MAN 339 Type V-1, 339 Type V-2, 339 Type Z-1, 339 Type Z-2, 339F · Mazda ATF-M III, ATF-MV, F-1 · Mercedes Benz 236.1, 236.2, 236.3, 236.5, 236.6, 236.7, 236.9, 236.10, 236.11, 236.81, 236.91 · Mitsubishi SP-II, SP-III, ATF-J2 · Nissan Matic-D, Matic-J, Matic-K, 402 · Saab 3309 · Shell 3403, LA 2634 · Subaru ATF, ATF-HP · Suzuki 3314, 3317 · Texaco ETL-7045E, ETL-8072B, N402 · Toyota Type T, T-II, T-III, T-IV · Voith 55.6335, 55.6336 · Volvo 97340, 97341 · VW/Audi G 052 162, G 052 990, G 055 025 · ZF TE-ML 03D, 04D, 05L, 09, 11A, 11B, 14A, 14B, 16L, 17C, 20B, 21L

Note: AMSOIL warrants the use of this product for Chrysler ATF+4* applications above -38°F. Product does not meet the cold temperature requirement of ATF+4 at -40°F. For warranty information, visit www.amsoil.com/warranty.aspx.

- **Fuel-Efficient (OTL)** CHF 22.75 /quart
 Engineered to exceed the requirements of original equipment manufacturers (OEMs) specifying low-viscosity oil.

Use in applications that require Aisin-Warner AW-1 · BMW 83 22 0 142 516, 83 22 2 152 426 · Chrysler Mopar 68157995A, 68218925AB, SP-IV · DSIH 6p805 · Ford MERCON LV · GM DEXRON VI · Honda/Acura DW-1, Type 3.0 · Hyundai/Kia SP-IV, SPH-IV, SP-IV-RR, NWS-9638, SP4-M · JASO 1A-LV · JWS 3324 · Mercedes Benz 236.12, 236.14, 236.15, 236.41 · Mitsubishi SP-IV, ATF J3, ATF-PA · Nissan Matic-S, Matic-W · Saab 93 165 147 · Shell M-1375.4, M-1375.5, M-1375.6, M-L 12108 · Toyota WS · Volvo 31256774 · VW/Audi G 055 005, G 055 162, G 060 162 · ZF S671 090 255

- **Synthetic CVT Fluid (cvt)** CHF 26.93 /quart

Provides outstanding protection and performance for continuously variable transmissions (CVT) throughout original equipment manufacturer (OEM)-recommended drain intervals.

Use in belt- and chain-type CVTs that require BMW EZL 799A (8322 0 136 376 / 8322 0 429 154) · Daihatsu Amix CVTF-DC, CVTF-DFE · FCA Mopar CVTF +4 (Mopar CVT 4) · Ford M2C928-A (CFT 23), WSS-M2C933-A (CFT 30, Motorcraft XT-7-QCFT), MERCON C · GM DEX-CVT, GM CVT (CVTF I-Green2) · Honda HMMF (08200-9006), HCF-2 · Hyundai/Kia SP-CVT 1 · Mazda CVTF 3320 · Mercedes Benz 236.20 (001 989 46 03) · Mitsubishi CVTF-J1, CVTF-J4 · Nissan NS-1, NS-2, NS-3 · Subaru e-CVT, i-CVT F, Lineartronic CV-30, Lineartronic CVTF/CVT-II (K0425Y0710), High Torque CVTF · Suzuki CVT Fluid Green 1, CVT Fluid Green 2 (NS-2), CVTF 3320 (TC) · Toyota/Lexus TC, FE · VW/Audi TL 52180 (G 052 180), TL 52516 (G 052 516)

- **100% Synthetic DCT Fluid (dct)** CHF 34.82 /quart **MARTI**
 Designed to protect high-tech dual-clutch transmissions during the most intense, high-heat operating conditions.

Use in applications that require BMW 83 22 2 148 578, 83 22 2 148 579, 83 22 0 440 214, 83 22 2 147 477, DCTF-1, MTF-LT5 · Chrysler 68044345 · Citroen/Pugeot 9734.S2 · Ferrari/Shell TF DCTF-3 · Fiat BOT 341 · Ford WSS-M2C-936-A, WSS-M2C200-D2, XT-11-QDC · Mercedes Benz 236.21, 236.25 · Mitsubishi Dia-Queen SSTF-I · Nissan GTR Transmission Oil R35 Special · Pentosin FFL-2, FFL-3, FFL-4 · Porsche 999.917.080.00, 043 207 29, 043 207 30, 000 430 20 · Renault BOT 450 · Volvo 1161838, 1161839 · VW/Audi G 052 182, G 052 529, TL 521 82

Handle More Heat With Confidence

Standard Severe Service
AMSOIL Severe Service
RESERVE PROTECTION
Change Interval - Miles





● Synthetic Manual Transmission and Transaxle Gear Lube (MTG)

MARTI CHF 28.78 /quart
CHF 28.78 /Beutel

Provides improved internal component protection. Formulated with extreme-pressure additives and advanced frictional qualities that provide smooth shifts while protecting gears, bearings and seals. Non-corrosive to yellow metals.

Use in applications that require API GL-4 • ZF TE-ML 02B, 17A, MB 235.5 & MAN 341-Z2 (formerly MAN 341 ML) • Synchronized manual transmissions and transaxles that require 75W-85, 75W-90 or 80W-90 API GL-4 Gear Lube • NV 4500 Transmissions • GM Part #12346190 • Chrysler Part #4874459 • Chrysler Spec MS-9070 • Certain Hyundai, Hino, Infiniti, Kia, Lexus, Mazda, Mitsubishi, Nissan, Suzuki, Toyota & Volkswagen models requiring GL-4

● Synthetic Synchronmesh Transmission Fluid (MTF) MARTI

Specifically designed to deliver smooth shifts and superior wear protection in manual transmissions and transaxles with synchronizers. CHF 29.71 /quart

Use in applications that require New Venture NV T350, NV1500, NV2500, NV3500, NV3550 & NV5600 • Tremec T4, T5, T18, T56, T176, TK0500, TK0600, TR3550 (GM Vehicles) & TR3450 • Honda Genuine MTF • GM Part #12345349, #12345577, #12377916 & #1052931 • Chrysler Part #4874464 & #4874465 • GM Specs #9985648, #9986105 & #9985535 • Chrysler Specs MS-9224 & MS-9417 • MTF-94 & Texaco MTX Fluids



● Super Shift® Racing Transmission Fluid (ART)

CHF 25.07 /quart

Formulated to prevent slippage and reduce heat in high-performance, high-horsepower vehicles.

Use in transmissions that require Allison C-4 • Ford Type F

● Torque-Drive® Synthetic Heavy-Duty Automatic Transmission Fluid (ATD)

CHF 111.42 /gallon

Premium fluid designed for use in both on- and off-highway heavy-duty equipment.

Use in transmissions that require Allison C-4, TES-295, TES-389 • Ford MERCON V • GM DEXRON III • Isuzu SCS • MAN 339 Type V-1, 339 Type V-2, 339 Type Z-1, 339 Type Z-2, 339 Type Z-3, 339F • MB 236.91, 236.10 • Voith 55.6335, 55.6336 • Volvo 97340, 97341 • ZF TE-ML 03D, TE-ML 04D, TE-ML 14A, TE-ML 14B, TE-ML 14C, TE-ML 17C, TE-ML 20B, TE-ML 20C



● Synthetic Tractor/Hydraulic Transmission Oil (ATH)

Formulated for combinations of transmissions, hydraulic systems, final drives, power take-off systems and wet brakes in heavy-duty farm and industrial equipment as well as commercial and residential lawn tractors.

Use in hydraulic systems that require SAE 5W-30

MARTI CHF 23.21 /quart





● SAE 50 Long-Life Synthetic Transmission Oil (FTF)

Specially formulated for manual transmissions found in high-torque, heavy-duty line-haul trucks and other commercial applications.

Use in transmissions that require Eaton PS-164 Rev. 7 • API GL-1 and MT-1 • Navistar/International TMS 6816 • Mack TO-A Plus • ZF Freedoline • Meritor 0-81 • Rockwell/Eaton/Fuller CD-50 (PS-081) CHF 114.67 /gallon

Synthetic Powershift Transmission Fluid

Provides outstanding friction performance for enhanced clutch engagement and superior wear protection for heavy-duty powershift transmissions.

SAE 10W (CTG) CHF 467.97 /5-gallon pail
Use in transmissions that require CAT TO-4 • Allison C-4 • Komatsu KES 07.868.1

SAE 30 (CTJ) CHF 439.65 /5-gallon pail
Use in transmissions that require CAT TO-4 • Allison C-4 • Komatsu KES 07.868.1

SAE 50 (CTL) CHF 468.90 /5-gallon pail
Use in transmissions that require CAT TO-4 • CD-50 • Komatsu KES 07.868.1



SEVERE GEAR® Synthetic EP Gear Lube

Specifically engineered for high-demand applications, including trailer towing, heavy hauling, 4x4 off-road driving, commercial use and racing. Delivers 20% more cold-temperature protection than required by ASTM D2983.

● **75W-90 (SVG)** MARTI CHF 32.96 /easy-pack qt.

Top fuel efficiency and cold-temperature performance

Delivers advanced protection against wear, even with up to 15 percent water contamination.^w

Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)

● **80W-90 (AGL)** MARTI CHF 22.28 /easy-pack qt. / CHF 21.36 /quart

Excellent extreme-pressure performance and wear protection

Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)

● **75W-110 (SVT)** MARTI CHF 32.96 /quart

Extra viscosity protection without sacrificing fuel efficiency

Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)


● **75W-140 (SVO)** MARTI CHF 32.96 /easy-pack qt.

Maximum viscosity protection for severe-duty applications


Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)



FloTool Flexible Pour Spout (G3721)

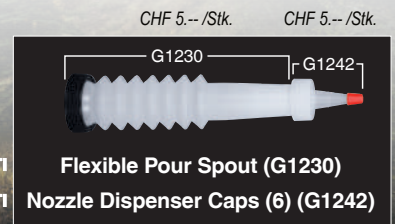

Flexible Pour Spout (G1230)
Nozzle Dispenser Caps (6) (G1242)



Gear Lube Hand Pump (G2039)

MARTI CHF 20.50 /Stk.

^wBased upon AMSOIL testing of AMSOIL Synthetic SEVERE GEAR® 75W-90 in ASTM 3233 and ASTM D892.

SRT



SEVERE GEAR® EP Synthetic Racing Gear Lube

Engineered specifically for the demands of severe racing conditions, including off-road truck racing, rock racing, rock crawling, tractor pulling, funny car racing and dragster racing applications.

- **SAE 250 (SRT)** CHF 29.71 /quart
Use in differentials that require API GL-5/MT-1

Long Life Synthetic Gear Lube

Specifically engineered for extended drain intervals up to 500,000 miles (804,672 km) as set by equipment manufacturers for over-the-road trucks and heavy equipment.

- **75W-90 (FGR)** CHF 26.00 /quart
Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J+ • Dana SHAES 256 (Eaton PS-163)
- **80W-140 (FGO)** CHF 506.50 /5-gallon pail (22.7 Liter)
Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J+ • Dana SHAES 256 (Eaton PS-163)

FGR



- **Slip Lock® Differential Additive (ADA)** MARTI CHF 13.46 /Tube 118ml

Designed to eliminate gear-housing chatter in cars, trucks and SUVs equipped with limited-slip differentials.

Note: AMSOIL synthetic gear lubes do not require the use of this additive. However, not all differentials respond the same and if chatter is noticed, the addition of AMSOIL Slip Lock will eliminate it.


ADA



AMSOIL®

99% Efficiency at 20 Microns

Filtering particles >20 microns fights engine wear^{AA}

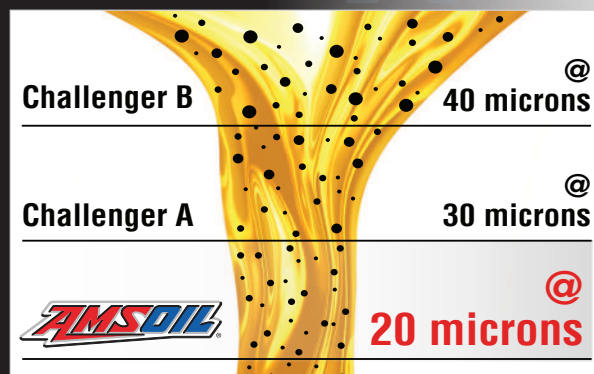

^{AA}In accordance with industry-standard ISO SO 4548-12.

Oil Filters (EAO/EA15K)

AMSOIL Oil Filters rank among the highest efficiency filters available to the auto/light-truck and powersports markets, providing a filtering efficiency of 99 percent at 20 microns. Featuring advanced full-synthetic technology, AMSOIL Oil Filters provide greater efficiency, capacity and durability than cellulose filters, extending engine and filter life and reducing engine wear.

- Oil Filters designated with product code EA15K are recommended for 15,000 miles (24,140 km)/one year, whichever comes first, in normal or severe service.
- Oil Filters designated with product code EAO are recommended for 25,000 miles (40,234 km)/one year, whichever comes first, in normal service or 15,000 miles (24,140 km)/one year, whichever comes first, in severe service.

NOTE: Change oil filter at every oil change.

Which filter do I need?

Call 1-800-956-5695 (Monday-Friday, 7 a.m. - 7 p.m. Central Time) or contact the AMSOIL Dealer listed on the back of your catalog (if one is listed) to determine the appropriate filter for each application. When AMSOIL Oil Filters are used with a motor oil other than AMSOIL motor oil the filter should be changed according to the vehicle manufacturer recommendation.

EAO/EA15K



More Premium Filters

AMSOIL offers a variety of specialty oil filters constructed with premium synthetic technology. Call (715) 399-8324 (TECH) (Monday-Friday, 8 a.m. - 5 p.m. Central Time) for application information.

EAHD



Heavy-Duty Extended-Life Oil Filters (EAHD)

Provide excellent 99 percent filtering efficiency at 20 microns and high contaminant capacity for heavy-duty on- and off-road diesel and gasoline applications. Provide extended service intervals that coincide with the maximum drain intervals of AMSOIL synthetic engine oils.

EABP



Bypass Filters (EABP90, EABP100, EABP110, EABP120)

High-efficiency bypass filters effectively remove minute dirt particles and soot.



Dual Remote Bypass Systems (BMK23, BMK26, BMK27, BMK28)

Versatile system combines full-flow and bypass oil filtration on a single, easy-to-install mount.

BMK30



Heavy-Duty Bypass System (BMK30)

Maximum filtration performance for virtually all heavy-duty diesel applications, including Class 6, 7 and 8 heavy-duty trucks, off-road equipment, buses, generators, marine engines, logging and agricultural equipment.

BMK21



Single-Remote Bypass Systems (BMK21, BMK31, BMK32, BMK33, BMK34)


Working in conjunction with the engine's full-flow oil filter, the AMSOIL Bypass Filter operates by filtering oil on a "partial-flow" basis, effectively reducing engine wear.

BMK22



DUAL-GARD® Bypass System (BMK22)

Links two AMSOIL Bypass Filter elements together for engines with sump capacities over 15 quarts. Allows fast and simple servicing with spin-on elements.



EAOM

Motorcycle Oil Filters (EAOM)

Most efficient filters available for the motorcycle and powersports market. Provide excellent 99 percent filtering efficiency at 20 microns. Available in black or chrome (as available).



DOMINATOR® Synthetic Racing Grease (GRG) CHF 26.93 /cartridge 397g

High-performance bearing and chassis lubrication for all race applications on snow, dirt, water and track. Designed for bearings that operate under high-speed, high-heat conditions.

Use in applications that require NLGI No. 2, GC/LB

MARTI



Synthetic Polymeric Off-Road Grease

Extreme-pressure, moly-fortified grease that provides outstanding protection for heavy-load-bearing applications, including steering knuckles, spring shackles, heavy equipment pivot joints and other components operating in high-load, low-speed conditions.

NLGI No. 1 (GPOR1) CHF 26.93 /cartridge 397g

NLGI No. 2 (GPOR2) CHF 26.93 /cartridge 397g

Synthetic Polymeric Truck, Chassis and Equipment Grease

Delivers excellent wear protection and performance in severe-service, extreme-pressure environments such as axle assemblies, U-joints, pivot pins, fifth-wheel plates, steering linkages, kingpins, water pump bearings, ball joints and other greasable bearings and chassis components.

NLGI No. 1 (GPTR1) CHF 18.57 /cartridge 397g

NLGI No. 2 (GPTR2) CHF 22.75 /cartridge 397g

Synthetic Multi-Purpose Grease (GLC) CHF 15.78 /cartridge 397g

Delivers premium wear protection for bearings, bushings, chassis lubrication and other applications.

Use in applications that require NLGI No. 2, GC/LB

MARTI

Synthetic Water-Resistant Grease (GWR) CHF 15.78 /cartridge 397g

Provides outstanding water-washout and spray-off resistance for applications frequently exposed to water, mud, snow or ice.

Use in applications that require NLGI No. 2, GC/LB

X-Treme Synthetic Food Grade Grease (GXC) CHF 19.50 /cartridge

Designed for high levels of protection in food and pharmaceutical industry equipment. NSF-approved formula (formerly USDA H-1) for incidental contact with food.

Use in applications that require NLGI No. 2

Synthetic Fifth-Wheel Grease (FWG) CHF 22.82 /tube

Heavy-duty grease that provides outstanding protection and performance in the heavily loaded, harsh operating environments of fifth-wheel hitches used in trucking and trailer applications.

Use in applications that require NLGI No. 2

Arctic Synthetic Grease (GEC) CHF 25.53 /cartridge

Provides extreme low-temperature pumpability and superior protection for equipment operating in harsh climates where temperatures drop well below freezing.

Use in applications that require NLGI No. 1

GLC3P

GLC

GLCGN

GEC

GXC

GRG

GPTR1

GPTR2

GWR

GWR3P

FWG



GSF



Spray Grease (GSP) CHF 17.18 / Spray 295ml

Applies quickly and evenly and is ideal for greasing hard-to-reach equipment, including hinges, springs, industrial chains, latches, slides, winches and other common applications.

Semi-Fluid Synthetic EP Grease (GSF) CHF 913.18 / Eimer 15,88 kg

Provides excellent wear protection and is ideal for leaky gear boxes in industrial and fleet applications, centralized lubrication systems and difficult-to-service applications.

Use in applications that require NLGI #00

Synthetic High Viscosity Lithium Complex Grease (GVC)

Excellent for use in heavy-duty industrial and off-road applications where equipment is working under adverse conditions, such as exposure to environmental elements, slow, heavily-loaded applications and shock-loading conditions.

Use in applications that require NLGI #2 CHF 15.32 / cartridge

GSP



ABC



● Semi-Synthetic Bar and Chain Oil (ABC) CHF 13.00 / quart

Delivers excellent lubrication and protection, helping extend the life of bar and chain applications.

Synthetic Compressor Oil

Superior protection for rotary screw, rotary vane, reciprocating and other compressor applications.

ISO 32, SAE 10W (PCH) CHF 399.26 / pail **ISO 68, SAE 30 (PCJ)** CHF 402.04 / 5 gallon-pail
ISO 46, SAE 20 (PCI) CHF 21.82 / quart **ISO 100, SAE 30/40 (PCK)** CHF 21.82 / quart

SIROCCO® Synthetic Compressor Oil (SEI) CHF 669.45 / 5 gallon-pail

Recommended as a direct replacement for PAG compressor oils such as Sullair Sullube* and Ingersol Rand SSR Ultra Coolant*.

Use in applications that require ISO 32/46

GVC



SEI



Synthetic Anti-Wear Hydraulic Oil

Offers superior protection for hard-working hydraulic systems from the stress of high-pressure, high-load and heavy-duty operations.

ISO 22 (AWG) CHF 570.10 / 5 gallon-pail **ISO 32 (AWH)** CHF 414.58 / 5 gallon-pail **ISO 46 (AWI)** CHF 414.58 / 5 gallon-pail

Synthetic Multi-Viscosity Hydraulic Oil

Cost-effective formulation that provides all-season protection and reliable operation in most types of hydraulic systems.

ISO 22 (HVG) CHF 332.87 / 5 gallon-pail **ISO 32 (HVI)** CHF 336.58 / 5 gallon-pail **ISO 46 (HVI)** CHF 340.76 / 5 gallon-pail **ISO 68 (HVJ)** CHF 363.51 / 5 gallon-pail

PCI



HVI



AWI



**INDUSTRY'S
MOST ADVANCED**
Formulation Improves
Fuel Economy

API




P.i.® (API) CHF 25.07 /bottle 355 ml **MARTI**


Restores up to 14 percent horsepower.^{NN}
Bottle compatible with capless fuel systems.
Add entire bottle to tank at fill-up.

AMSOIL Restores Horsepower

AMSOIL P.i.® restores up to 14% horsepower.^{NN}

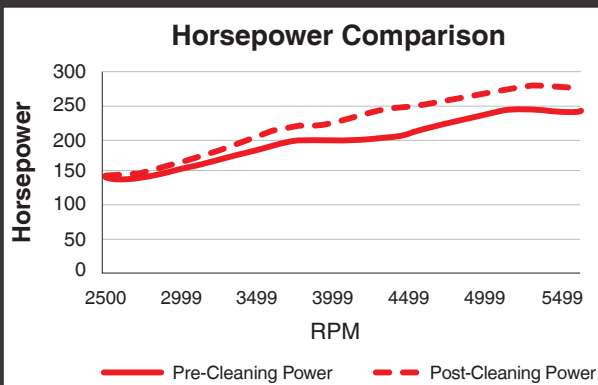

^{NN}Based on third-party testing in a 2016 Chevrolet® Silverado® 1500, 5.3L V-8 GDI with 100,616 miles, using one tank treated with AMSOIL P.i. Actual results may vary. All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.

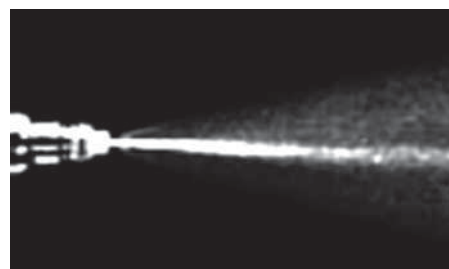

**Injector spray pattern before
P.i. treatment.**



**Injector spray pattern after
P.i. treatment.**



**Injector before
P.i. treatment.**



**Injector after one
P.i. treatment.**



**Cylinder head
before P.i.
treatment.**



**Cylinder head
after one P.i.
treatment.**

AQS



Addresses Ethanol-Related
Performance Issues

Quickshot® (AQS) CHF 18.57 /bottle 236 ml **MARTI**

Effectively addresses performance issues related to ethanol, water and dirty pump gas in two- and four-stroke gasoline-powered engines and powersports equipment fuel systems, restoring peak performance.

**Motorcycles • Snowmobiles • Boats • ATVs • Edgers • Tillers
• Mowers • Snowblowers • Chainsaws • Generators • Farm &
Construction Equipment • and more**

Phase separation is when ethanol/water mixtures fall to the bottom of fuel tanks and containers, leading to lean-burn conditions.

Quickshot helps keep water molecules dispersed to prevent phase separation.



**PHASE
SEPARATION
Water dyed blue**

DIRECTIONS:
One bottle treats up to
6 gallons (23 litres) for
cleanup and up to 12
gallons (45 litres) for
continued protection.
For best results use
with every tank.

Degraded fuel can present a major maintenance issue in motorcycle engines, forming varnish, gum and insoluble debris that clog carburetors, fuel injectors and fuel filters. Carbon buildup can form on the tops of pistons resulting in pre-ignition, rough idling and poor throttle response. Fuel-related problems are only expected to intensify in the coming years as the ethanol content in pump gasoline continues to increase.

AMSOIL Quickshot (AQS) is a premium fuel additive formulated to thoroughly clean and restore peak performance in motorcycle and powersports equipment fuel systems. It also stabilizes fuel between uses and during short-term storage periods.



Upper Cylinder Lubricant Gasoline Additive (UCL) CHF 7.89 /bottle 148 ml **MARTI**

Lubricates fuel system and upper cylinders. Fights ethanol-related corrosion. Helps keep injectors clean. Bottle compatible with capless fuel systems. Use entire bottle at every fill-up.

Gasoline Stabilizer (AST) CHF 15.78 /bottle 475 ml **MARTI**

Helps prevent the formation of varnish and sludge in stored seasonal equipment such as snowmobiles, lawnmowers, motorcycles and boats. One ounce (60 ml) treats 2.5 gallons (9.46 litres) of fuel.

Engine Fogging Oil (FOG) CHF 16.25 /bottle 355 ml

Helps prevent corrosion and dry starts to internal engine components found in outboard motors, lawn and garden equipment, motorcycles, snowmobiles, ATVs, motor homes and generators during storage or long periods of inactivity.

DOMINATOR® Octane Boost (AOB) CHF 16.25 /bottle 355 ml **MARTI**

Improves the performance of all two- and four-stroke gasoline-fueled engines. Treats up to 15 gallons (57 litres) of gasoline.

Motorcycle Octane Boost (MOB) CHF 10.21 /bottle 118 ml **MARTI**

Increases octane up to three numbers for maximum power and efficiency in motorcycles. Treats 4-6 gallons (15-23 litres) of gasoline.

Diesel Injector Clean (ADF) CHF 10.21 /bottle 236 ml, CHF 15.78 /bottle 473 ml

Targets traditional nozzle deposits, combustion chamber deposits and internal diesel injector deposits found in HPCR injectors. Lubricates to reduce fuel pump and injector wear. Concentrated for rapid results, maximum horsepower and up to 8 percent increased fuel economy in engines with accumulated deposits. One ounce (30 ml) treats up to 5 gallons (18.93 L) of fuel.

Diesel Cold Flow (ADD) CHF 19.02 /bottle 473 ml

Effectively modifies wax crystal formation at low temperatures to depress diesel fuel pour point, prevent wax settling and improve cold-flow filtration properties. Lowers cold filter-plugging point (CFPP) by up to 40°F (22°C) in ultra-low-sulfur diesel fuel (ULSD). One ounce (30 ml) treats up to 5 gallons (18.93 L) of fuel.

Diesel Injector Clean + Cetane Boost (ADS) CHF 17.18 /bottle 473 ml **MARTI**

Combines the superior deposit-removing properties of Diesel Injector Clean with the cetane-boosting benefits of Diesel Cetane Boost in one convenient package. One ounce (30 ml) treats up to 5 gallons (18.93 L) of fuel.

Diesel All-In-One (ADB) **MARTI**

Combines the superior deposit-removing properties of Diesel Injector Clean, the excellent anti-gelling properties of Diesel Cold Flow and the cetane-boosting benefits of Diesel Cetane Boost in one convenient package. One ounce (30 ml) treats up to 2.5 gallons (9.46 L) of fuel. CHF 13.93 /bottle 236 ml, CHF 19.03 /bottle 473 ml, CHF 67.32 /bottle 1.89 L


Diesel Cetane Boost (ACB) CHF 22.50 /bottle 473 ml

Raises the cetane number of diesel fuel up to eight points for maximum horsepower, increased fuel economy and easier starts in all diesel engines. Diesel engines operate best on fuel with cetane values of 50 or higher. Most diesel fuel sold in North America has a cetane value of 40-45. One ounce (30 ml) treats up to 10 gallons (37.85 L) of fuel.

Five-gallon pails and 55-gallon drums are filled to 98 percent of packaging capacity to allow for product expansion in warm temperatures.



BETTER THAN HOWES*
Type "AMSOIL: All in One Diesel" at youtube.com to check out the details.

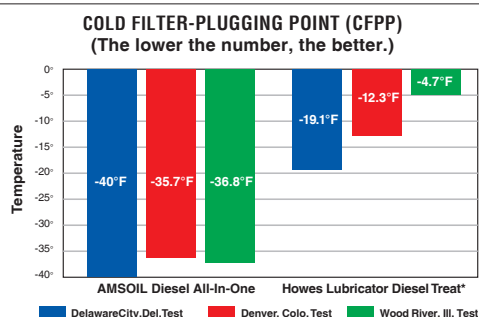

Superior Cold-Temperature Protection

Provides as much as **32°F better protection** against cold-temperature gelling than Howes Lubricator Diesel Treat.^M Plus raises cetane up to 4 points.

^MBased on independent testing in July 2017 of AMSOIL Diesel All-In-One and Howes Lubricator Diesel Treat using diesel fuel representative of the U.S. marketplace and Howes' recommended treat ratio for above 0°F.



Diesel Recovery (DRC) CHF 19.03 /bottle 887 ml
Emergency diesel fuel treatment that liquefies gelled diesel fuel and thaws frozen fuel filters. Keep a bottle on hand for emergencies. One ounce (30 ml) treats up to 1 gallon (3.79 L) of fuel.



Power Foam® (APF) CHF 18.57 /spray can 532 ml **MARTI**
Improves starting and performance by cleaning dirty intake systems and spark plugs, freeing sticky valves and removing gum, varnish and carbon deposits.



Heavy-Duty Degreaser (ADG) CHF 16.71 /spray can 443 ml
Formulated with powerful and fast-acting solvents, attacking petroleum-based grime on a molecular level to loosen its hold on metal, concrete and other surfaces.




Silicone Spray (ALS) CHF 15.78 /spray can 295 ml
Perfect for lubricating or protecting rubber, nylon, plastics, upholstery, vinyl, wood, cardboard or fiberglass. Also excellent for waterproofing leather products. Hundreds of household uses.



Mudslinger® (AMS) CHF 14.39 /spray can 355 ml **MARTI**
Provides a protective layer of armor against the accumulation of mud, dirt and snow on ATVs, UTVs and dirt bikes, easing clean-up.



Engine Degreaser (AED) CHF 13.46 /spray can 443 ml **MARTI**
Effectively cleans engine surfaces by cutting through grease, oil and grime.

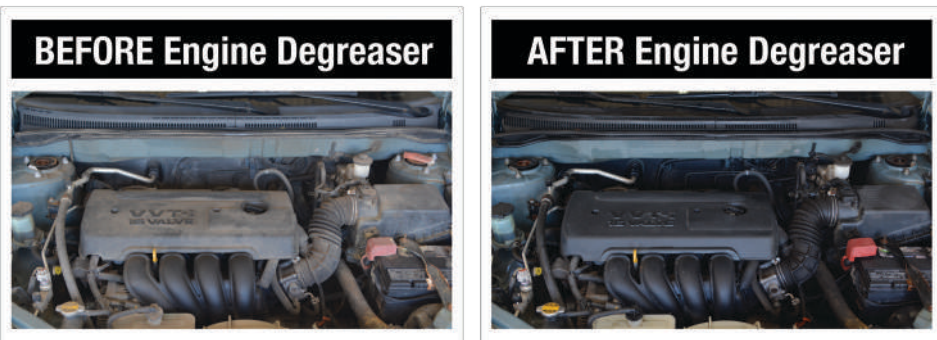

Glass Cleaner (AGC) CHF 10.21 /spray can 443 ml
Cuts through grease and grime faster than other leading glass cleaners, stays where you spray it and leaves no streaks.



Metal Protector (AMP) CHF 13.93 /spray can 258 ml
Displaces water, penetrates, lubricates and protects metal surfaces from corrosion, including hinges, squeaky mechanical objects, electrical systems and more.



Heavy-Duty Metal Protector (AMH) CHF 19.03 /spray can 473 ml **MARTI**
Penetrates and adheres to metal surfaces, leaving a long-lasting coating that protects against the damaging effects of salt, moisture or chemical corrosion.

Synthetic Air Tool Oil (AIR) CHF 6.96 /bottle 118 ml
Effectively lubricates rotary and piston-type air-tool bearings and motors, while managing moisture and conditioning rubber and plastic seals and O-rings.



Chain Lube (ACL) CHF 21.36 /bottle 325 ml **MARTI**
Provides outstanding protection against wear and corrosion. Helps extend chain life. Does not attract dirt and does not fling off. Fast-drying.

FLSH



Engine and Transmission Flush (FLSH) CHF 21.82 /bottle 473 ml **MARTI**

Helps restore operating efficiency, increase fuel economy and reduce emissions in gasoline and diesel engines and automatic transmissions.

DOMINATOR® Coolant Boost (RDCB) CHF 24.14 /bottle 473 ml **MARTI**

Helps reduce engine temperatures, increase horsepower, promote faster engine warm-up times and reduce radiator and engine corrosion in racing and passenger vehicles.

RDCB



● Propylene Glycol Antifreeze & Coolant (ANT) CHF 95.64 /gallon

Combines the benefits of biodegradability, low toxicity and all-weather protection for up to 150,000 miles (241,402 km) or 5 years, whichever comes first, in passenger cars and light trucks. Protection up to 1,000,000 miles (1,609,344 km), 20,000 hours or 8 years, whichever comes first, in heavy-duty applications. Concentrated formula.

Use in applications that require ASTM D3306, D6210, D7583, D7820 • TMC RP329B, TMC RP338 • AS/NZS 2108.2004 Type A Suitable for use with Case New Holland • Cummins 14603 • Cummins 3666132 • DDC 7SE 298, 93K217 • Freightliner 48-22880 • GM Heavy Truck • International Truck and Engine / Navistar CEMS B-1 Type III-A • JIS K2234 • MAN 324 NF • MB DBL 7700 • MTU MTL 5048 • Kenworth RO26-170-97 • Mack 014GS17004, 014GS17009 • PACCAR CS0185 • DAF MAT 74002 • Peterbilt 8502.002 • Scania TB1451 • Volvo Heavy Truck

ANT



● Passenger Car/Light Truck Antifreeze & Coolant (ANTPC) CHF 37.14 /gallon **MARTI**

Engineered to exceed original equipment manufacturer (OEM) requirements for up to 150,000 miles (241,402 km) or 5 years, whichever comes first, in passenger cars and light trucks. Pre-mixed formula.

Formulated for use in ALL domestic and import passenger cars and light trucks. Engineered to meet original equipment manufacturer (OEM) specifications GM 6277; JIS K2234; VW TL 774D; Ford WSS-M97B44-D and ASTM D3306 requirements.

● Powersports Antifreeze & Coolant (PSAF) CHF 15.32 /quart **MARTI**

Advanced design helps control operating temperature in hot-running, high-revving powersports applications. Extended-life formula provides all-season protection for up to five years.

PSAF



ANTPC



AMSOIL Resists Corrosion ●●

In independent, industry-standard testing, cast-iron and copper plates protected by AMSOIL showed virtually **no signs of corrosion**.^{HH}

^{HH}Based on results of the ASTM D2570 corrosion test.



AMSOIL Resists Cavitation ●

In independent, industry-standard testing, cylinder liners protected by AMSOIL showed virtually **no signs of cavitation**.^{II}

^{II}Based on results of the ASTM D7583 cavitation test.



● Heavy-Duty Antifreeze & Coolant (ANTHD) CHF 39.00 /gallon

Provides superior heat transfer and excellent protection against corrosion, cylinder-liner cavitation, freezing and boilover. Protection up to 1,000,000 miles (1,609,344 km), 20,000 hours or 8 years, whichever comes first. Pre-mixed formula.

Use in applications that require ASTM D3306, D6210, D7583, D7820 • TMC RP329B, TMC RP338 • AS/NZS 2108.2004 Type A Suitable for use with Case New Holland • Cummins 14603 • Cummins 3666132 • DDC 7SE 298, 93K217 • Freightliner 48-22880 • GM Heavy Truck • International Truck and Engine / Navistar CEMS B-1 Type III-A • JIS K2234 • MAN 324 NF • MB DBL 7700 • MTU MTL 5048 • Kenworth RO26-170-97 • Mack 014GS17004, 014GS17009 • PACCAR CS0185 • DAF MAT 74002 • Peterbilt 8502.002 • Scania TB1451 • Volvo Heavy Truck

ANTHD





Synthetic Firearm Lubricant and Protectant (FLPBA, FLPSC) MARTI

Effectively lubricates and protects firearms, helping extend life and prevent blockage, jams and wear. Outstanding protection and performance in both hot and cold climates. Specifically formulated for firearms, offering superior performance over multi-purpose products.

CHF 16.71 /bottle 118 ml, CHF 13.00 /spray 148 ml

Firearm Cleaner and Protectant (FCPSC, FCPCN) MARTI

Penetrates deep into hard-to-reach components, effectively cleaning fouling and powder residue from all firearm surfaces, safely protecting them for storage, reducing jamming and increasing reliability. Protects against corrosion, allowing for safe storage and preserving performance, reliability and value.

CHF 15.78 /bottle 236 ml, CHF 14.39 /spray 148 ml



DOT 3 & 4 Synthetic Brake Fluid (BFLV) MARTI

High-performance brake fluid specially designed as a multi-use product for passenger-car, light-truck and powersports applications.

Use in equipment that requires a DOT 3, 4 or 5.1 brake fluid.

CHF 13.93 /bottle 355 ml

DOMINATOR® DOT 4 Synthetic Racing Brake Fluid (BFR) MARTI

High boiling point brake fluid engineered to resist brake fade and vapor lock during intense racing applications.

Use in racing equipment that requires a DOT 4 brake fluid.



Brake and Parts Cleaner (BPC) CHF 11.61 /spray 443 ml (exkl. VOC)

Professional-strength parts cleaner that quickly removes oil, grease, brake fluid and other contaminants from brake parts and other automotive components.

Multi-Vehicle Synthetic Power Steering Fluid (PSF) CHF 14.39 /bottle 473 ml

Provides excellent wear protection, long component life and quiet operation in most passenger cars and light trucks.

Use in applications that require American Motor Corporation C 4124; 4634 • BMW 82 11 0 148 132; 83 29 0 429 576; 81 22 1 468 879 & 82 11 1 468 041 • Chrysler MS-1872; MS-5931, MS-9602 & MS-11655 • Ford M2C138-CJ; ESW-M2C128-C&D; M2C195-A; M2C204-A & M2C33-F • GM/Saginaw PSF 9985010; 9985835; 89021184 & 1050017 • Hyundai/Kia PSF-3; PSF-4 & PSF 00232-19017 • Mercedes Benz 236.3; 345.0; 001 989 24 03 10; 001 989 24 03 12 & Q 1 32 0001 • Mitsubishi Diamond SP III & PS Fluid • Navistar TMS 6810 • Nissan PSF-II • Porsche 000 043 206 56 • Saab 93160548; (45) 30 09 800 & 30 32 380 • Subaru K0209A0080 • Toyota PSF Type EH; P/N 008886-01 • Volvo 1161529 & 30741424 • VW/Audi TL-52146; G002000; G 004 000 M2; G 004 000 M7 & G 004 000 M8



Miracle Wash® Waterless Wash & Wax (AMW) CHF 13.93 /spray 384 ml

Unique dry car wash and polish delivers outstanding performance and quick, easy and economical application. No water required.

Fluid Extraction Pump (G2576) CHF 39.--

Aids in the removal of power steering fluid, motor oil, drivetrain lubricants and engine coolant. Can also be used to install fresh lubricants in hard-to-reach areas.





INTERNATIONAL-ONLY PRODUCTS

These products are exclusive international products that are available to distributors, in addition to the full AMSOIL product line.

Extreme Power Synthetic Motor Oil

Formulated to deliver outstanding wear protection and resistance to oil consumption, even in severe conditions. High-performance lubricant designed for street-driven vehicles.

● 0W-30 (P300)

Use in vehicles that require API SP, SN PLUS, SN... • BMW LL-04 • Mercedes-Benz 229.51 • Volkswagen 504.00/507.00 • Porsche C30 • ACEA C3 • GM dexos2

● 0W-40 (P400) CHF 27.39 /quart

Use in vehicles that require API SN, SM... • ACEA A3/B3, A3/B4 • BMW LL-01 • Mercedes-Benz 229.1, 229.3, 229.5 • Porsche A40 • Renault 0710, 0700 • Volkswagen 502.00, 505.00

OE Synthetic Motor Oil

Delivers 100% synthetic engine protection for advanced automotive technology, including turbos and direct injection. Specifically formulated for the longer drain intervals recommended by original equipment (OE) manufacturers.

● 5W-40 (OEB) CHF 15.32 /quart

Use in vehicles that require API SP, SN PLUS, SN... • ACEA A3/B3

● 10W-40 (OEH)

Use in vehicles that require API SP, SN PLUS, SN...

○ 20W-50 (OER) CHF 15.32 /quart

Use in vehicles that require API SP, SN PLUS, SN...



Synthetic 4T Performance Motorcycle Oil

Formulated for the high temperatures common to air-cooled V-twins, aggressively driven sport bikes and daily drivers operating in the most severe conditions. Delivers the confidence and security that come with outstanding protection and performance.

● 10W-30 (MC3) CHF 14.39 /quart

Use in bikes that require JASO MA/MA2 • API SL, SJ, SH, SG

Use in motorcycles that require 10W-30 motorcycle oil.

● 10W-40 (MC4) CHF 14.39 /quart

Use in bikes that require JASO MA/MA2 • API SN, SM, SL, SJ, SH, SG

Use in motorcycles that require 10W-40 motorcycle oil.

● 20W-50 (MC5) CHF 14.39 /quart

Use in bikes that require JASO MA/MA2 • API SN, SM, SL, SJ, SH, SG

Use in motorcycles that require 20W-50 or 15W-50 motorcycle oil

● 10W-50 Synthetic Metric Motorcycle Oil (MSR)

Whether riding aggressively, cruising or in stop-and-go traffic, AMSOIL Synthetic Metric Motorcycle Oil delivers the benefits most important to riders, including premium wear protection; smooth, confident shifts and cool, clean performance.

Use in bikes that require API SN JASO MA/MA2, ISO-L-EMA2

● Gasoline Additive (AGA) CHF 7.89 /bottle 236 ml

High-performance gasoline additive formulated with potent synthetic detergent additives. Provides excellent deposit clean-up and keep-clean performance in both direct-injected and port-injected engines.



Marti & Co. AG • Saxweg 5 • CH-9470 Buchs
www.marti-buchs.ch • Tel. 081 750 51 00 • info@marti-buchs.ch